


Commercial Battery System

APX 129~200kWh

- 129kWh ~ 200kWh for 480V WIT inverters
- Module level energy optimization
- Support to mix new and old battery modules in one system
- Easy installation with modular and stacked design
- Long lifespan, 10 years warranty

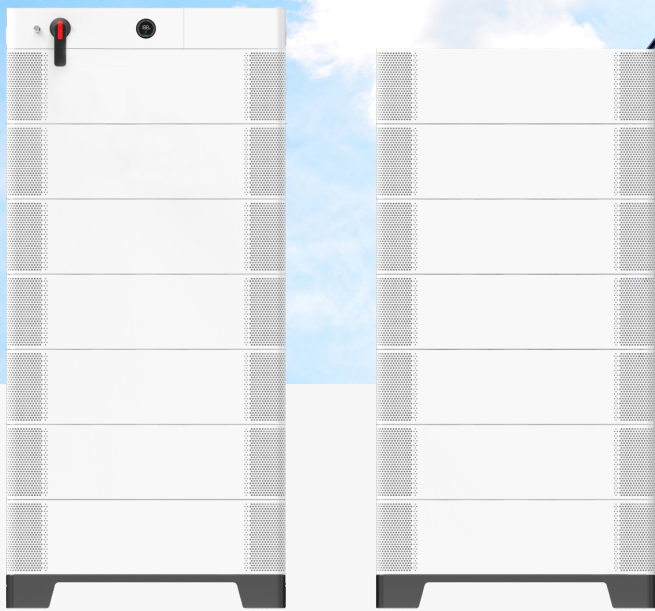

Preliminary Version

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

Datasheet	APX 129.0H-S1-US	APX 143.3H-S1-US	APX 157.6H-S1-US	APX 172.0H-S1-US	APX 186.3H-S1-US	APX 200.7H-S1-US
System demo						
Control module	APX 1000140-C1-US					
Number of power modules	1					
Battery module	APX 14.3P-B1-US					
Battery module energy	14.33kWh					
Number of battery modules	9	10	11	12	13	14
Nominal energy	129.02kWh	143.36kWh	157.69kWh	172.03kWh	186.36kWh	200.70kWh
Rated energy	116.11kWh	129.02kWh	141.92kWh	154.82kWh	167.72kWh	180.63kWh
Max. output power*1	64kW	71kW	78kW	86kW	93kW	100kW
Peak output power	103kW,60s	114kW,60s	126kW,60s	137kW,60s	149kW,60s	160kW,60s
Dimension (W/D/H) /column*2	920/510/1350mm/2 36.2/20.0/53.1inch/2	920/510/1485mm/2 36.2/20.0/58.4inch/2	920/510/1598mm/2 36.2/20.0/62.9inch/2	920/510/1733mm/2 36.2/20.0/68.2inch/2	920/510/1846mm/2 36.2/20.0/72.6inch/2	920/510/1981mm/2 36.2/20.0/78.0inch/2
Weight	1277kg/28154lbs	1412kg/3112lbs	1547kg/3410lbs	1682kg/3708lbs	1817kg/4005lbs	1952kg/4303lbs
Nominal voltage	820V					
Operating voltage range	650V~945V					
Output full load voltage range	720V~880V					
Nominal capacity	280AH(@25°C)					
Rated capacity	252AH(@25°C)					
Battery type	Cobalt Free Lithium Iron Phosphate (LFP)					
Ingress protection	IP66/NEMA 4X					
Installation*3	Floor installation					
DOD	90%					
Operating ambient temperature	-10°C~-50°C/14°F~-122°F					
Relative humidity	5%~95%					
Cooling	Smart air cooling					
Altitude	≤4000m (13123ft)					
Warranty	10 years					
Control Module	APX 1000140-C1-US					
Dimension(W/D/H)	920/510/135mm 36.2/20.0/5.3inch					
Weight	25kg/55.1lbs					
Communication port	CAN					
Operating voltage range	250V-950V					
Maximum current	140A					
Peak current	224A,60s					
Monitoring parameters	SOC, system voltage, current, cell voltage, cell temperature, PCBA temperature					
Battery Module	APX 14.3P-B1-US					
Nominal energy	14.33kWh					
Nominal voltage	80V					
Operating voltage range	0~105V					
Dimensions(W/D/H)	920/510/248 mm 36.2/20.0/9.7inch					
Weight	135kg/297.6lbs					

UN38.3, UL1973, UL9540, UL9540A, FCC

*1 Depend on the max. battery charge/discharge power of the inverter.

*2 Include power module (HVC 1000140-C1-US)

*3 Floor installation requires extrabase (W*D*H=920/510/110mm)

* 2023 SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. Subject to change without notice.